


SkyGlass2

Het SkyGlass-venster onderscheidt zich van de andere glasproducten door gebruik te maken van een ononderbroken glasoppervlak dat een subliem panorama-uitzicht biedt. Het SkyGlass2-venster heeft ook uitstekende isolatiewaarden door gebruik te maken van een thermisch gescheiden structuur.

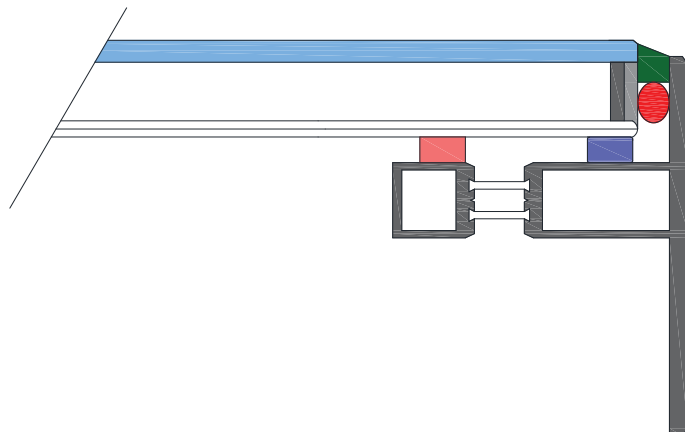

Het glasvenster is verkrijgbaar in dubbel- en drievoudig glas, standaard veiligheidsglas of zonwerend veiligheidsglas, helder of opaal. Hierdoor kunnen we de beste oplossing aanbieden voor wat U zoekt.

Producteigenschappen

	Classificatie	Norm
Waterdicht	CLASS 3A	EN 1027:2000
Windlast	CLASS A	EN 12211:2000
Luchtdicht	CLASS 2	EN 1026:2000
Doorvalveilig	1C2/1B1	EN12600
Brandclassificatie	Broof (t1)	EN 13501-5:2016

Frame

Materiaal	Aluminium (thermisch gescheiden profiel)
Kleur	RAL7016
Afwatering	Op elke hoek van het frame
Waterdicht gelast (aanbevolen dakhelling 2°-20°)	Op elke hoek van het frame

Specifieke eigenschappen 2-laags glas

Samenstelling	LTA (%)	ZTA (%)	U-waarde (W/m ² K)	Rw (dB)
ESG 6MM CLEAR/16ARG/44.2 PVB CLEAR	80	62	1.1	37
ESG 6MM CLEAR/16ARG/44.2 PVB MAT	59	59	1.1	37
ESG 6MM SOLAR/16ARG/44.2 PVB CLEAR	69	37	1.0	37
ESG 6MM CLEAR/16ARG/55.4 PVB CLEAR	79	62	1.1	39
ESG 6MM CLEAR/16ARG/55.4 PVB MAT	59	59	1.1	39
ESG 6MM SOLAR/16ARG/55.4 PVB CLEAR	68	37	1.0	39
ESG 8MM CLEAR/16ARG/55.4 PVB CLEAR	78	78	1.1	41
ESG 8MM CLEAR/16ARG/55.4 PVB MAT	58	58	1.1	41
ESG 8MM SOLAR/16ARG/55.4 PVB CLEAR	67	37	1.0	41
ESG 10MM CLEAR/16ARG/55.4 PVB CLEAR	77	60	1.1	41
ESG 10MM CLEAR/16ARG/55.4 PVB MAT	58	57	1.1	41
ESG 10MM SOLAR/16ARG/55.4 PVB CLEAR	67	36	1.0	41

Specifieke eigenschappen 3-laags glas

Samenstelling	LTA (%)	ZTA (%)	U-waarde (W/m²K)	Rw (dB)
ESG 6MM CLEAR/16ARG/ESG 6MM CLEAR/16ARG/44.2 PVB CLEAR	72	57	0.9	39
ESG 6MM CLEAR/16ARG/ ESG 6MM CLEAR/16ARG/44.2 PVB MAT	54	54	0.9	39
ESG 6MM SOLAR/16ARG/ ESG 6MM CLEAR/16ARG/44.2 PVB CLEAR	62	34	0.5	39
ESG 6MM CLEAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB CLEAR	71	56	0.8	41
ESG 6MM CLEAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB MAT	53	54	0.8	41
ESG 6MM SOLAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB CLEAR	61	34	0.5	41
ESG 8MM CLEAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB CLEAR	71	55	0.8	43
ESG 8MM CLEAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB MAT	53	53	0.8	43
ESG 8MM SOLAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB CLEAR	61	34	0.5	43
ESG 10MM CLEAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB CLEAR	70	54	0.8	45
ESG 10MM CLEAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB MAT	52	52	0.8	45
ESG 10MM SOLAR/16ARG/ ESG 6MM CLEAR/16ARG/55.4 PVB CLEAR	60	33	0.5	45

Beschikbare maten en glassamenstellingen

